

# 佰蒂科技 ELIKE LIGHTING

## CONTACT US

佰蒂科技有限公司

ELIKE TECHNOLOGY CO., LIMITED

邮箱 / E-mail: [elike@elikelighting.com](mailto:elike@elikelighting.com)

网址 / Website: [www.elikelighting.com](http://www.elikelighting.com)

地址 / Address: 广东省中山市古镇曹兴东路88号首层

#88 East Caoxing Road, Guzhen Town, Zhongshan City, Guangdong, China.

佰蒂科技  
ELIKE LIGHTING

[www.elikelighting.com](http://www.elikelighting.com)



LED灯具散热整体解决方案供应商

LED LIGHTING HEAT RADIATION INTEGRATED SOLUTION PROVIDER

投射灯系列





## HD-A COOLING SUITE HD-A系列套件

广泛适用于船灯、捕鱼灯、工业厂房、体育场馆、码头、高尔夫球场、建筑照明、广场、塔吊...  
Widely used in boat light, fishing light, industrial workshop, sports venues, wharf, golf courses, building lighting, square, and tower crane




### 产品特点 Product Features

- ▶ LED投光灯散热体，均采用热管柳接鳍片散热技术解决高功率散热难题让芯片、驱动寿命更长。
- ▶ 散热套件整体均经电泳处理，耐腐蚀性更强，通过500小时盐雾测试。
- ▶ 防水等级达到IP65，满足各种户外恶劣环境要求。
- ▶ 多款散热套件选择，可提供100W~500W散热套件，根据不同照明环境选择不同灯具。
- ▶ 可适装不同的驱动、芯片，可根据不同要求选择配件。
- ▶ LED cast light lamp heat sink, the use of heat pipe cooling technology to solve the problem of high power dissipation, so that the chip, drive longer life
- ▶ The whole body of the heat radiating body is treated by oxidation, and the corrosion resistance is stronger, and the heat radiation body is tested by 500 hour salt spray test.
- ▶ protection level to IP65, dust and waterproof, to meet all kinds of outdoor harsh Environmental requirements
- ▶ a variety of heat sink (100W~500W) can be used to choose according to different photos Different lamp housing with different lighting environment
- ▶ can be fitted with different drivers, chips, according to the different requirements of the choice of accessories


### 材质工艺 Material and Process

- ▶ 鳍片均采用航空专用铝材，经过本公司扣片技术工艺处理。
- ▶ 纯铜热管经鳍片压管工艺，热管紧密贴合鳍片技术。
- ▶ 玻璃工艺，均采用高钢化处理，透光率达到93%。
- ▶ 整灯均采用不锈钢防锈螺丝。
- ▶ 固定支架均采用合金铝材、加粗、加宽、具有抗风、耐腐蚀等特点。
- ▶ fins adopts special aluminum material for aviation, through the buckle piece of technical process
- ▶ is made of pure copper tube after fins pipe process, closely joint fins heat pipe technology
- ▶ glass craft, adopt high steel processing, light transmittance as high as 93%
- ▶ the overall adopt stainless steel rust screws
- ▶ fixed bracket adopt aluminum alloy and widen the bold, has the wind resistance, resistant to Corrosion etc.

500W 25° 配光曲线  
500W 25° Light distribution curve



500W 25° 照度图  
500W 25° Illumination curve



产品型号	灯珠型号	灯珠数量	串并方式	散热体尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
HD-A100	3030	120	6串20并	155*285*160	5.1KG	8KG	46*46*54	IP65
HD-A150	3030	150	6串25并	190*285*160	5.7KG	8.5KG	46*46*54	IP65
HD-A200	3030	210	7串30并	190*285*160	5.9KG	8.8KG	46*46*54	IP65
HD-A300	3030	320	8串20并*2	190*285*160	6KG	8.9KG	46*46*54	IP65
HD-A400	3030	400	8串25并*2	255*285*160	7.2KG	10.1KG	46*46*54	IP65
HD-A500	3030	480	8串30并*2	330*285*160	8.4KG	11.3KG	46*46*54	IP65



## ► HD-B COOLING SUITE HD-B系列套件

广泛适用于船灯、捕鱼灯、工业厂房、体育场馆、码头、高尔夫球场、建筑照明、广场、塔吊...  
Widely used in boat light, fishing light, industrial workshop, sports venues, wharf, golf courses, building lighting, square, and tower crane




### 产品特点 Product Features

- ▶ LED投光灯散热体，均采用热管柳接鳍片散热技术解决高功率散热难题让芯片、驱动寿命更长。
- ▶ 散热套件整体均经电泳处理，耐腐蚀性更强，通过500小时盐雾测试。
- ▶ 防水等级达到IP65，满足各种户外恶劣环境要求。
- ▶ 多款散热套件选择，可提供100W~500W散热套件，根据不同照明环境选择不同灯具。
- ▶ 可适装不同的驱动、芯片，可根据不同要求选择配件。
- ▶ LED cast light lamp heat sink, the use of heat pipe cooling technology to solve the problem of high power dissipation, so that the chip, drive longer life
- ▶ The whole body of the heat radiating body is treated by oxidation, and the corrosion resistance is stronger, and the heat radiation body is tested by 500 hour salt spray test.
- ▶ protection level to IP65, dust and waterproof, to meet all kinds of outdoor harsh Environmental requirements
- ▶ a variety of heat sink (100W~500W) can be used to choose according to different photos Different lamp housing with different lighting environment
- ▶ can be fitted with different drivers, chips, according to the different requirements of the choice of accessories


### 材质工艺 Material and Process

- ▶ 鳍片均采用航空专用铝材，经过本公司扣片技术工艺处理。
- ▶ 纯铜热管经鳍片压管工艺，热管紧密贴合鳍片技术。
- ▶ 玻璃工艺，均采用高钢化处理，透光率达到93%。
- ▶ 整灯均采用不锈钢防锈螺丝。
- ▶ 固定支架均采用合金铝材、加粗、加宽、具有抗风、耐腐蚀等特点。
- ▶ fins adopts special aluminum material for aviation, through the buckle piece of technical process
- ▶ is made of pure copper tube after fins pipe process, closely joint fins heat pipe technology
- ▶ glass craft, adopt high steel processing, light transmittance as high as 93%
- ▶ the overall adopt stainless steel rust screws
- ▶ fixed bracket adopt aluminum alloy and widen the bold, has the wind resistance, resistant to Corrosion etc.

500W 25° 配光曲线  
500W 25° Light distribution curve



500W 25° 照度图  
500W 25° Illumination curve



产品型号	灯珠型号	灯珠数量	串并方式	散热体尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
HD-B150	3030	150	6串25并	250*270*135	5.7KG	5.7KG	46*46*54	IP65
HD-B200	3030	210	7串30并	270*270*135	6.0KG	8.8KG	46*46*54	IP65
HD-B300	3030	320	8串20并*2	270*270*135	6.3KG	9.1KG	46*46*54	IP65
HD-B400	3030	400	8串25并*2	310*270*135	7KG	9.7KG	46*46*54	IP65
HD-B500	3030	480	8串30并*2	310*330*170	8.6KG	10.4KG	46*46*54	IP65
HD-B600	3030	672	8串28并*3	365*330*170	10.0KG	13.5KG	46*46*54	IP65
HD-B700	3030	672	8串28并*3	405*330*170	10.7KG	14.3KG	49*49*54	IP65



广泛适用于船灯、捕鱼灯、体育场馆、码头、塔吊、高尔夫球场、广场...

Widely used in boat light, fishing light, sports venues, wharf, tower crane, golf courses, square

#### 产品特点 Product Features

- LED投光灯散热体，均采用热管铆接鳍片散热技术解决高功率散热难题让芯片、驱动寿命更长。
- 散热套件整体均经电泳处理，耐腐蚀性更强，通过500小时盐雾测试。
- 防水等级达到IP65，满足各种户外恶劣环境要求。
- 多款散热套件选择，可提供800W-1500W散热套件，根据不同照明环境选择不同灯具。
- 可适配不同的驱动、芯片，可根据不同要求选择配件。
- LED cast light lamp heat sink, the use of heat pipe cooling technology to solve the problem of high power dissipation, so that the chip, drive longer life
- The whole body of the heat radiating body is treated by oxidation, and the corrosion resistance is stronger, and the heat radiation body is tested by 500 hour salt spray test.
- protection level to IP65, dust and waterproof, to meet all kinds of outdoor harsh Environmental requirements
- a variety of heat sink (800W-1500W) can be used to choose according to different photos Different lamp housing with different lighting environment
- can be fitted with different drivers, chips, according to the different requirements of the choice of accessories




#### 材质工艺 Material and Process


- 鳍片均采用航空专用铝材，经过本公司扣片技术工艺处理。
- 纯铜热管经鳍片压管工艺，热管紧密贴合鳍片技术。
- 玻璃工艺，均采用高钢化处理，透光率达到93%。
- 整灯均采用不锈钢防锈螺丝。
- 固定支架均采用合金铝材、加粗、加宽、具有抗风、耐腐蚀等特点。
- fins adopts special aluminum material for aviation, through the buckle piece of technical process
- is made of pure copper tube after fins pipe process, closely joint fins heat pipe technology
- glass craft, adopt high steel processing, light transmittance as high as 93%
- the overall adopt stainless steel rust screws
- fixed bracket adopt aluminum alloy and widen the bold, has the wind resistance, resistant to Corrosion etc.



1000W 45° 配光曲线  
1000W 45° Light distribution curve



1000W 45° 照度图  
1000W 45° Illumination curve



BF-800W



BF-1000W



BF-1500W



产品型号	灯珠型号	灯珠数量	串并方式	散热体尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
BF-800	3030	1248	8串39并*4	365*410*230	17.5KG	21.2KG	53*55*57	IP65
BF-1000	3030	1248	8串39并*4	440*410*230	21.8KG	25.8KG	63*55*57	IP65
BF-1500	3030	1440	8串30并*6	535*410*230	23.1KG	26.8KG	72*55*57	IP65



## ► TS COOLING SUITE TS系列套件

广泛适用于摩天大厦、娱乐场、大型商场、桥梁、码头、电视塔、雕塑、渔船...  
Widely used in Skyscrapers, casino, supermarkets, bridges, docks, TV towers, sculpture, fishing vessel...

### 产品特点 Product Features

- LED投射灯散热体，均采用热管铆接鳍片散热技术解决大功率灯具散热问题，使用寿命更长。
- 防护等级达到IP65，满足各种户外恶劣环境使用需求
- 多款散热套件选择，可提供100~800W散热套件，根据不同照明环境选择不同灯具。
- 散热套件整体均经电泳处理，耐腐蚀，抗老化，通过500小时盐雾测试。
- 可适用市场大部分的驱动、芯片，高兼容性满足您的定制需求。
- LED projection lamp radiator adopts heat pipe riveting fin heat dissipation technology to solve the heat dissipation problem of high-power lamps, with longer service life
- The protection grade reaches IP65, which can meet the needs of various outdoor harsh environments
- A variety of heat dissipation kits can be selected, including 100~800w heat dissipation kits, and different lamps and lanterns can be selected according to different lighting environments
- The heat dissipation kit is electrophoretic, corrosion resistant and anti-aging, and tested through 500 hours salt spray test.
- It can be applied to most of the drivers and chips in the market, with high compatibility to meet your customized requirements




### 材质工艺 Material and Process


- 鳍片均采用航空专用铝材，经过本公司扣片技术工艺处理。
- 纯铜热管经鳍片压管工艺，热管紧密贴合鳍片技术。
- 玻璃工艺，均采用高钢化处理，透光率达到93%。
- 整灯均采用不锈钢防锈螺丝。
- 固定支架均采用合金铝材、加粗、加宽、具有抗风、耐腐蚀等特点。
- fins adopts special aluminum material for aviation, through the buckle piece of technical process
- is made of pure copper tube after fins pipe process, closely joint fins heat pipe technology
- glass craft, adopt high steel processing, light transmittance as high as 93%
- the overall adopt stainless steel rust screws
- fixed bracket adopt aluminum alloy and widen the bold, has the wind resistance, resistant to Corrosion etc.



TS500W 5° 配光曲线  
TS500W 5° Light distribution curve



TS500W 5° 照度图  
TS500W 5° Illumination curve



产品型号	灯珠型号	灯珠数量	串并方式	散热体尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
TS-150-200	CREE-XTE	54	9串6并	250*270*135	5.9KG	7.2KG	42.5*42.5*34	IP65
TS-300-400	CREE-XML2	54	9串3并*2	310*270*135	7.2KG	8.5KG	42.5*42.5*34	IP65
TS-500-600	CREE-XML2	84	14串3并*2	365*330*170	12.5KG	14.5KG	53*53*39	IP65
TS-800	CREE-XHP50	72	6串3并*4	365*330*170	20.56KG	22.8KG	59*53.5*44.5	IP65
TS-1000	CREE-XHP50	72	6串3并*4	440*410*230	22.5KG	27.5KG	59*53.5*44.5	IP65



广泛适用于体育场馆、码头、高尔夫球场、建筑照明、广场照明

Widely used in industrial buildings, stadiums, wharf, golf courses, building lighting, square

**QCA400~500**



**QCA800~1000**



**QCA600~700**




**QCA1000~1200**




**200~1200W  
QCA SERIES HEATSINK**



**500W配光曲线  
500W Light distribution curve**



**500W照度图  
500W Illumination curve**




**产品特点 Product Features**

- 采用全铝模块与鳍片精密铆接，让LED光源与散热体紧密接触，结合风道设计完全解决LED散热问题
- 表面喷粉工艺处理，通过500小时盐雾测试，具有出色的防腐蚀、防锈功能，整体防护等级达到IP65，适合各种恶劣户外环境
- Using all aluminum module and fin precision riveting, let LED light source and radiator close contact, combined with air duct design, completely solve the LED heat dissipation problem
- After 500 hours of salt spray test, it has excellent anti-corrosion and anti rust functions. The overall protection level reaches IP65, which is suitable for all kinds of harsh outdoor environment

**材质工艺 Material and Process**

- 优质压铸铝底板与1060型号铝材鳍片铆接
- 光学级PC材质透镜
- 采用全铝之家与不锈钢配件
- High quality die casting aluminum base plate riveted with 1060 aluminum fin
- Optical grade PC lens
- All aluminum house and stainless steel accessories

产品型号	灯珠型号	灯珠数量	串并方式	灯体尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
200W/250W	3030	252	7串36并*1	566*116*308	4.2KG	5.1KG	63*16.5*33.5	IP65
400W/500W	3030	504	7串36并*2	566*241*308	6.7KG	7.6KG	62*29*19	IP65
600W/700W	3030	756	7串36并*3	566*366*308	9.0KG	10.3KG	61*41.5*19	IP65
800W/1000W	3030	1008	7串36并*4	566*491*308	11.5KG	13.1KG	61*54*19	IP65
1000W/1200W	3030	1260	7串36并*5	566*616*308	14KG	15.8KG	61*66.5*19	IP65

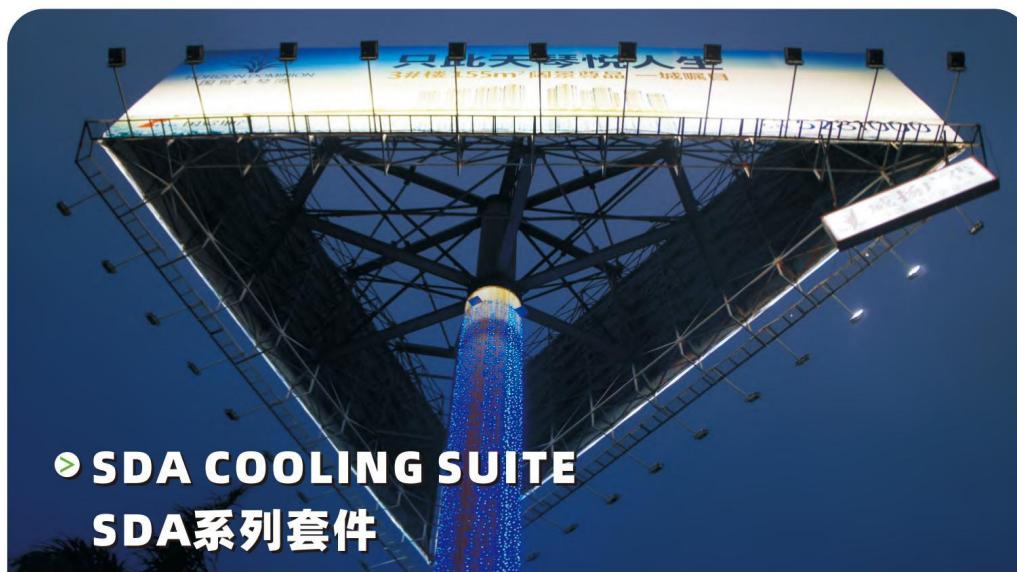

## SDA COOLING SUITE SDA系列套件

广泛适用于公路隧道照明、市政工程照明、城市景观照明、建筑照明、户外广告照明等。  
Widely used in highway tunnel lighting, municipal engineering, lighting, urban landscape lighting, building lighting, outdoor advertising lighting, etc

SDA-100



SDA-200





SDA-300



SDA-400



SDA-500

50~600W  
SDA SERIES HEATSINK100W配光曲线  
100W Light distribution curve100W照度图  
100W Illumination curve

### 产品特点 Product Features

- 采用全铝模块与鳍片精密铆接，让LED光源与散热体紧密接触，结合风道设计完全解决LED散热问题
- 表面喷粉工艺处理，通过500小时盐雾测试，具有出色的防腐蚀、防锈功能，整体防护等级达到IP65，适合各种恶劣户外环境
- Using all aluminum module and fin precision riveting, let LED light source and radiator close contact, combined with air duct design, completely solve the LED heat dissipation problem
- After 500 hours of salt spray test, it has excellent anti-corrosion and anti rust functions. The overall protection level reaches IP65, which is suitable for all kinds of harsh outdoor environment

### 材质工艺 Material and Process

- 优质压铸铝底板与1060型号铝材鳍片铆接
- 光学级PC材质透镜
- 采用全铝之家与不锈钢配件
- High quality die casting aluminum base plate riveted with 1060 aluminum fin
- Optical grade PC lens
- All aluminum house and stainless steel accessories


产品型号	灯珠型号	灯珠数量	串并方式	整灯尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
SDA-50W	3030	60	5/6串12/10并*1	328*70*211	0.9KG	1.1KG	37.5*12*24.5	IP65
SDA-100W	3030	120	5/6串12/10并*2	328*150*211	1.1KG	1.9KG	36.5*20*15	IP65
SDA-150W	3030	180	5/6串12/10并*3	328*230*211	1.5KG	1.9KG	36.5*28*15	IP65
SDA-200W	3030	240	5/6串12/10并*4	328*310*211	1.8KG	2.4KG	36.5*36*15	IP65
SDA-250W	3030	300	5/6串12/10并*5	328*390*211	2.1KG	2.7KG	36.5*44*15	IP65
SDA-300W	3030	360	5/6串12/10并*6	328*470*211	2.5KG	3.2KG	36.5*52*15	IP65
SDA-400W	3030	480	5/6串12/10并*8	610*310*226	3.8KG	4.6KG	66*36*21	IP65
SDA-500W	3030	600	5/6串12/10并*10	610*390*226	4.0KG	5.2KG	66*44*21	IP65
SDA-600W	3030	720	5/6串12/10并*12	610*470*226	4.8KG	6.2KG	66*52*21	IP65



广泛适用于公路隧道照明、市政工程照明、城市景观照明、建筑照明、户外广告照明等。  
Widely used in highway tunnel lighting, municipal engineering, lighting, urban landscape lighting, building lighting, outdoor advertising lighting, etc



**100W配光曲线**  
100W Light distribution curve



**100W照度图**  
100W Illumination curve



### 产品特点 Product Features

- 采用全铝模块与鳍片紧密结合的全新技术，更好的让LED光源与散热体零接触，结合风道散热完全的解决LED散热问题。
- 表面处理工艺是喷粉，通过500小时盐雾测试，具有出色的防腐蚀防锈功能，防护等级达到IP65，适合各种恶劣的户外环境。
- Adopts the aluminum module and fins closely combined with the new technology, better let the LED light source and the heat dissipation body zero contact, combined with wind cooling completely solve the problem of LED heat dissipation
- Surface treatment process is spray powder, through 500 hours of salt spray test, have excellent anti-corrosion rust-proof function, reach IP65 protection grade, suitable for all kinds of harsh outdoor environment

### 材质工艺 Material and Process

- 压铸铝底板与1060型号铝材鳍片相结合
- 光学级PC材料透镜
- 采用全铝支架与不锈钢配件
- die-casting aluminum plate combined with 1060 type aluminum fins
- Optical lens PC material
- Adopt the aluminum and stainless steel fittings



产品型号	灯珠型号	灯珠数量	串并方式	整灯尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
SDB-50W	3030	60	5/6串12/10并*1	315*87*213.5	1.54KG	1.86KG	38.5*14*25	IP65
SDB-100W	3030	120	5/6串12/10并*2	315*183*213.5	2.14KG	2.64KG	36.5*23.5*22.5	IP65
SDB-150W	3030	180	5/6串12/10并*3	315*279*213.5	2.71KG	3.34KG	36.5*33*15.5	IP65
SDB-200W	3030	240	5/6串12/10并*4	315*375*213.5	3.34KG	4.18KG	42.5*36.5*15.5	IP65
SDB-250W	3030	300	5/6串12/10并*5	315*417*213.5	3.92KG	4.96KG	52*36.5*15.5	IP65
SDB-300W	3030	360	5/6串12/10并*6	315*267*213.5	4.48KG	5.72KG	62*36.5*15.5	IP65
SDB-400W	3030	480	5/6串12/10并*8	631*375*213.5	6.68KG	8.36KG	68*43.5*19.5	IP65
SDB-500W	3030	600	5/6串12/10并*10	631*471*213.5	7.84KG	9.92KG	68*53*19.5	IP65
SDB-600W	3030	720	5/6串12/10并*12	631.567*213.5	8.96KG	11.44KG	68*62.5*19.5	IP65




广泛适用于公路隧道照明、市政工程照明、城市景观照明、建筑照明、户外广告照明等。  
Widely used in highway tunnel lighting, municipal engineering, lighting, urban landscape lighting, building lighting, outdoor advertising lighting, etc




50~600W  
SDC SERIES HEATSINK



100W配光曲线  
100W Light distribution curve



100W照度图  
100W Illumination curve



### 产品特点 Product Features

- 采用全铝模块与鳍片紧密结合的全新技术，更好的让LED光源与散热体零接触，结合风道散热完全的解决LED散热问题。
- 表面处理工艺是喷粉，通过500小时盐雾测试，具有出色的防腐蚀防锈功能，防护等级达到IP65，适合各种恶劣的户外环境。
- Adopts the aluminum module and fins closely combined with the new technology, better let the LED light source and the heat dissipation body zero contact, combined with wind cooling completely solve the problem of LED heat dissipation
- Surface treatment process is spray powder, through 500 hours of salt spray test, have excellent anti-corrosion rust-proof function, reach IP65 protection grade, suitable for all kinds of harsh outdoor environment

### 材质工艺 Material and Process

- 压铸铝底板与1060型号铝材鳍片相结合
- 光学级PC材料透镜
- 采用全铝支架与不锈钢配件
- die-casting aluminum plate combined with 1060 type aluminum fins
- Optical lens PC material
- Adopt the aluminum and stainless steel fittings




优质PC透镜60°90°可选择

产品型号	灯珠型号	灯珠数量	串并方式	整灯尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
SDC-50W	3030	60	5/6串12/10并*1	302*74*128	0.55KG	0.98KG	36*12.5*16	IP65
SDC-100W	3030	120	5/6串12/10并*2	302*158*168	0.86KG	1.31KG	34*21*14.5	IP65
SDC-150W	3030	180	5/6串12/10并*3	302*242*168	1.17KG	1.76KG	34*29.5*14.5	IP65
SDC-200W	3030	240	5/6串12/10并*4	302*326*168	1.48KG	2.11KG	34*37.5*14.5	IP65
SDC-250W	3030	300	5/6串12/10并*5	302*410*168	1.79KG	2.56KG	34*46*14.5	IP65
SDC-300W	3030	360	5/6串12/10并*6	302*494*168	2.10KG	2.80KG	34*54.5*14.5	IP65
SDC-400W	3030	480	5/6串12/10并*8	590*326*210	3.79KG	4.59KG	38*62*17	IP65
SDC-500W	3030	600	5/6串12/10并*10	590*410*210	4.42KG	5.42KG	46*62*17	IP65
SDC-600W	3030	720	5/6串12/10并*12	590*494*210	5.05KG	6.15KG	54.5*62*17	IP65




广泛适用于加油站、工业厂房等照明场所

Widely used in gas stations, industrial plants and other lighting places

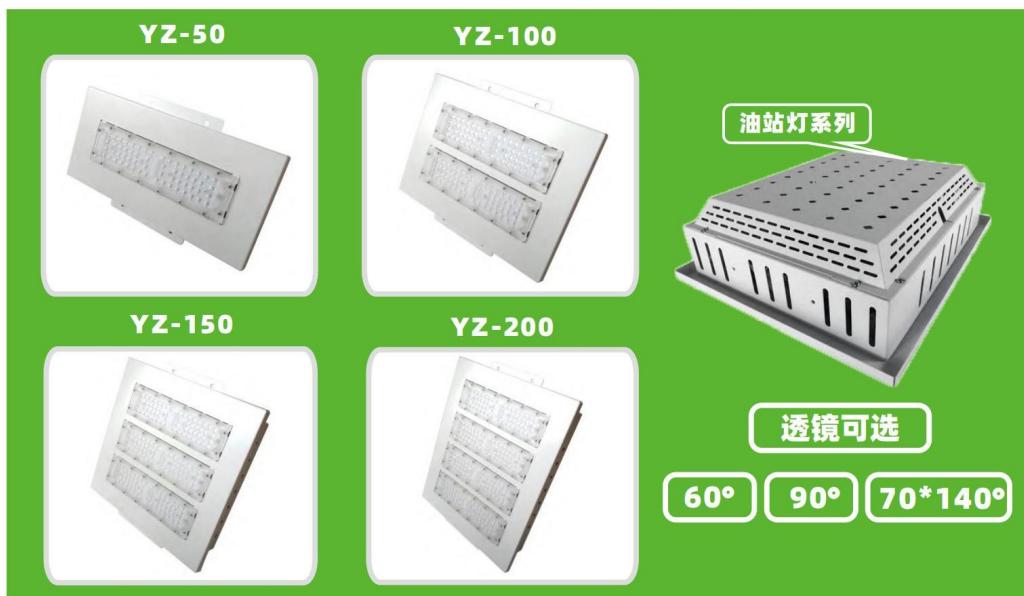


50~200W  
YZ SERIES HEATSINK

200W 60° 配光曲线  
200W 60° Light distribution curve



200W 60° 照度图  
200W 60° Illumination curve



### 优质散热模块



### 一体式设计



产品型号	灯珠型号	灯珠数量	串并方式	整灯尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
YZ-50	3030	60	5/6串12/10并*1	194*350*115	2.3KG	2.7KG	40*21*15	IP65
YZ-100	3030	120	5/6串12/10并*2	280*350*115	3.5KG	3.5KG	40*30*15	IP65
YZ-150	3030	180	5/6串12/10并*3	366*350*115	4.5KG	4.5KG	40*38.5*15	IP65
YZ-200	3030	240	5/6串12/10并*4	452*350*115	5.3KG	5.3KG	47*40*15	IP65



广泛适用于仓库、大型商场、厂房、走廊通道、娱乐场所、矿山、造船厂、油站等。  
Widely used in warehouse, large shopping mall, factory, corridor, entertainment, mine, shipyard, oil station, etc.

### 产品特点 Product Features

- ▶ 专业的散热结构，内外通透的风道设计。
- ▶ 3种透镜选择，能满足不同应用环境配光要求。
- ▶ 防水等级达到IP65，满足各种户外恶劣环境要求。
- ▶ 飞碟状3D立体的外观设计，科技感十足。
- ▶ Professional cooling structure, internal and external transparent duct design.
- ▶ 3 lenses can be used to meet the requirements of different application environments.
- ▶ protection level to IP65, dust and waterproof, to meet all kinds of outdoor harsh Environmental requirements
- ▶ Flying saucer shaped 3D design, full of sense of technology.



**100~200W  
UFOA SERIES HEATSINK**



### 材质工艺 Material and Process

- ▶ 板金冲压
- ▶ 采用1060纯铝主传导散热
- ▶ 光学级PC材料透镜
- ▶ Sheet metal stamping
- ▶ 1060 pure aluminum main conduction heat dissipation
- ▶ Optical lens PC material

### 主视



### 俯视



### 发光面



产品型号	灯珠型号	灯珠数量	串并方式	散热体尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
UFOA-100	3030	119	7串17并	φ278*54	0.8KG	2.1KG	34*30*15	Ip65
UFOA-150	3030	210	7串30并	φ328*60	1.0KG	2.26KG	37*36*16.5	Ip65
UFOA-200	3030	266	7串38并	φ388*75	1.5KG	3.75KG	43*42*17.5	Ip65



广泛适用于工业厂房、体育场馆、码头、高尔夫球场、建筑照明、广场...  
Widely used in industrial buildings, stadiums, wharf, golf courses, building lighting, square

#### 材质工艺 Material and Process

- ▶ 鳍片均采用航空专用铝材，经过铆接扣片处理。
- ▶ 底板镶嵌技术，使鳍片完美贴合光源。
- ▶ 采用高钢化处理玻璃，透光率可达93%以上。
- ▶ 整灯均采用不锈钢防锈配件。
- ▶ 固定支架采用合金材料、加粗、加宽、安装牢固，耐腐蚀。
- ▶ fins adopts special aluminum material for aviation, through the buckle piece of technical process
- ▶ is made of pure copper tube after fins heat pipe technology
- ▶ glass craft, adopt high steel processing, light transmittance as high as 93%
- ▶ the overall adopt stainless steel rust screws
- ▶ fixed bracket adopt aluminum alloy and widen the bold, has the wind resistance, resistant to Corrosion etc.



200~1200W  
QCA SERIES HEATSINK



TDA-200



TDA-300



TDA-400



TDA-500



TDA-600



#### 产品特点 Product Features

- ▶ LED高杆灯散热体，均采用热管铆接鳍片散热技术解决大功率灯具散热问题，使用寿命更长。
- ▶ 防护等级达到IP65，满足各种户外恶劣环境使用需求
- ▶ 多款散热套件选择，可提供200-600W散热套件，根据不同照明环境选择不同灯具。
- ▶ 散热套件整体均经电泳处理，耐腐蚀，抗老化，通过500小时盐雾测试。
- ▶ 可适用市场大部分的驱动、芯片，高兼容性满足您的定制需求。
- ▶ LED projection lamp radiator adopts heat pipe riveting fin heat dissipation technology to solve the heat dissipation problem of high-power lamps, with longer service life
- ▶ The protection grade reaches IP65, which can meet the needs of various outdoor harsh environments
- ▶ A variety of heat dissipation kits can be selected, including 100-800w heat dissipation kits, and different lamps and lanterns can be selected according to different lighting environments
- ▶ The heat dissipation kit is electrophoretic, corrosion resistant and anti-aging, and tested through 500 hours salt spray test.
- ▶ It can be applied to most of the drivers and chips in the market, with high compatibility to meet your customized requirements

产品型号	灯珠型号	灯珠数量	串并方式	散热体尺寸 (mm)	外壳重量	整体重量	包装尺寸	防护等级
TDA-200W	3030	203	7串29并	159*260*90	3.6KG	5.1KG	41.5*41.5*37	IP65
TDA-300W	3030	301	7串43并	231*260*90	4.7KG	5.9KG	41.5*41.5*37	IP65
TDA-400W	3030	406	7串58并	303*260*90	5.7KG	6.9KG	41.5*41.5*37	IP65
TDA-500W	3030	500/504	5/7串50/36并*4	231*260*129	6.4KG	7.9KG	46.5*46.5*48.5	IP65
TDA-600W	3030	600/602	5/7串60/43并*4	303*260*129	8.0KG	9.5KG	46.5*46.5*48.5	IP65